

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 May 2005 (12.05.2005)

PCT

(10) International Publication Number
WO 2005/043024 A1

(51) International Patent Classification⁷: **F16L 19/065**,
23/06, 23/08, 23/032

C. [US/US]; 3495 Edison Road, Cleveland Heights, OH 44121 (US). **MEDVICK, Richard, John** [US/US]; 1454 Burlington Road, Cleveland Heights, OH 44118 (US).

(21) International Application Number:
PCT/US2004/036436

(74) Agent: **SZABO, Paul, E.**; 800 Superior Avenue, Suite 1400, Cleveland, OH 44114-2688 (US).

(22) International Filing Date:
2 November 2004 (02.11.2004)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/481,594 3 November 2003 (03.11.2003) US

(71) Applicant (for all designated States except US):
SWAGELOK COMPANY [US/US]; 29500 Solon Road, Solon, OH 44139 (US).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE,

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WILLIAMS, Peter,**

[Continued on next page]

(54) Title: FITTING FOR METAL PIPE AND TUBING

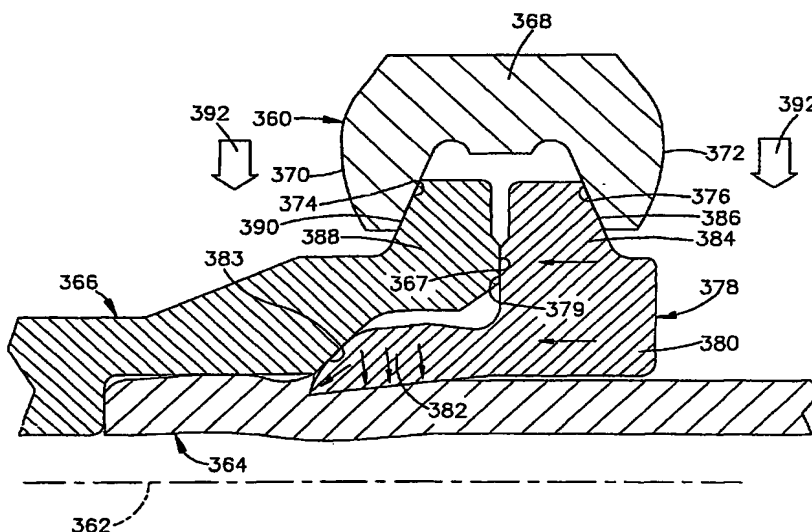

(57) Abstract: A tube fitting for connection with a tube (364) includes first and second flanged members (366, 378) and a ferrule (382) between the first and second flanged members. The ferrule (382) engages the tube (364) to form a tube grip and seal when the first and second flanged members (366, 378) are drawn together. A method includes the steps of providing first and second flanged members (366, 378) on a tube (364), providing a ferrule (382) on the tube between the first and second flanged members and drawing the first and second flanged members together to cause the ferrule to engage the tube to form a tube grip and seal. A tapered clamp (360) may be used to draw the flanged members together.



SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.